



Line Interactive UPS

VI 1000/1500/2000 LCD




- Protect your PC from power interference or failure
- Green design increases charging efficiency and reduces 50% charging time
- Reduced power consumption and cost saving
- Built-in LCD indicator for easy to use
- Software bundled for monitoring UPS status

Package Contents


1K • UPS unit
• USB cable
• 2pcs IEC cable
• CD
• Quick Start Guide
• Hotline Addendum

1.5-2K • UPS unit
• AC input power cord
• USB cable
• CD
• Quick Start Guide
• Hotline Addendum

LCD Display

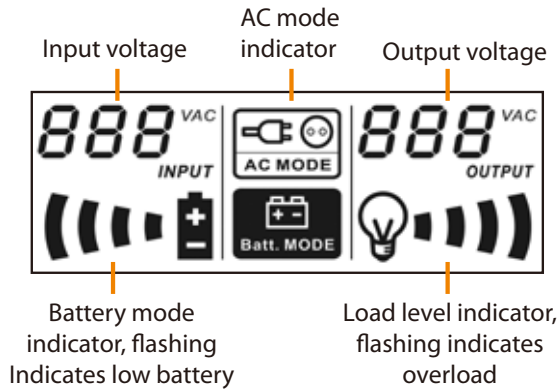

Rear Panel

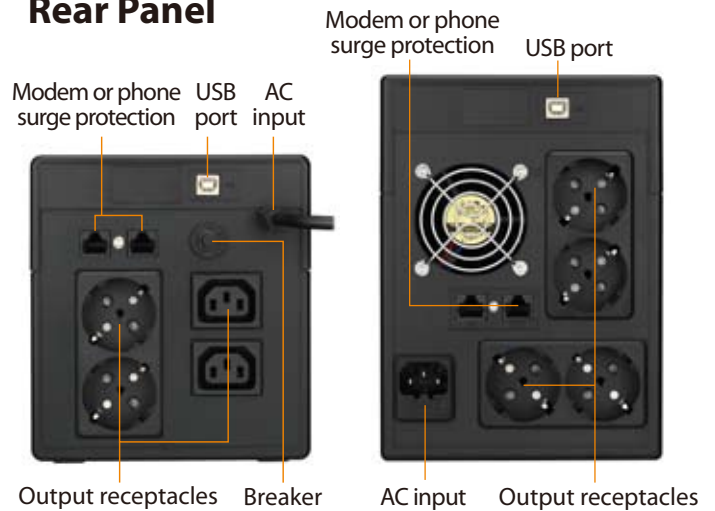

VI 1000 LCD

VI 1500/2000 LCD

Specifications

Model	PowerWalker VI 1000 LCD	PowerWalker VI 1500 LCD	PowerWalker VI 2000 LCD
CAPACITY	1000 VA / 600 W	1500 VA / 900 W	2000 VA / 1200 W
INPUT			
Voltage	220/230/240 VAC		
Voltage Range	162~290 VAC		
Frequency Range	50/60 Hz (Auto sensing)		
OUTPUT			
Voltage Regulation	+/-10%		
Frequency Range	50 or 60 Hz +/-1 Hz		
Transfer Time	Typical 2-6 ms, 10 ms max.		
Waveform	Simulated Sine Wave		
BATTERY			
Type & Number	12 V/7 AH x 2	12 V/9 AH x 2	12 V/9 AH x 2
Charging Time	4-6 hours recover to 90% capacity		
Protection	Overload, discharge and overcharge protection		
BACKUP TIME			
Load w/ 2 PC & 2 17" Monitor (est. 240W)	11 mins	18 mins	20 mins
INTERFACE			
Output Receptacle	Schuko x 2, IEC x 2	Schuko x4	Schuko x4
USB Port	1		
Telephone /Fax /Modem / Network Surge Suppression Port	2 (IN and OUT)		
PHYSICAL			
LCD Indicator	AC mode, Battery Mode, Load level, Battery capacity, Input/output voltage, Overload, Fault		
Dimension (DxWxH)	350 x 146 x 160	397x146x205 mm	
Net Weight (kgs)	8.0	11.1	11.5
ENVIRONMENT			
Humidity	0-90 % RH @ 0-40° C (non-condensing)		
Noise Level	Less than 40 dB		
SOFTWARE			
Via USB connection	Supports Windows 98 SE/ME/NT 4.x/2000/2003/XP/Vista/2008		



AIPTEK International GmbH
 Stahlwerk Becker 8
 47877 Willich
 Phone number : +49 (0) 2154-9235 500
 Fax number : +49 (0) 2154-9235 680
 E-Mail: info@aiptek.de